

**CROWN**



# SC 5700

**1,360–1,810 kg Capacity**

Sit-down Rider Lift Truck

## Specifications



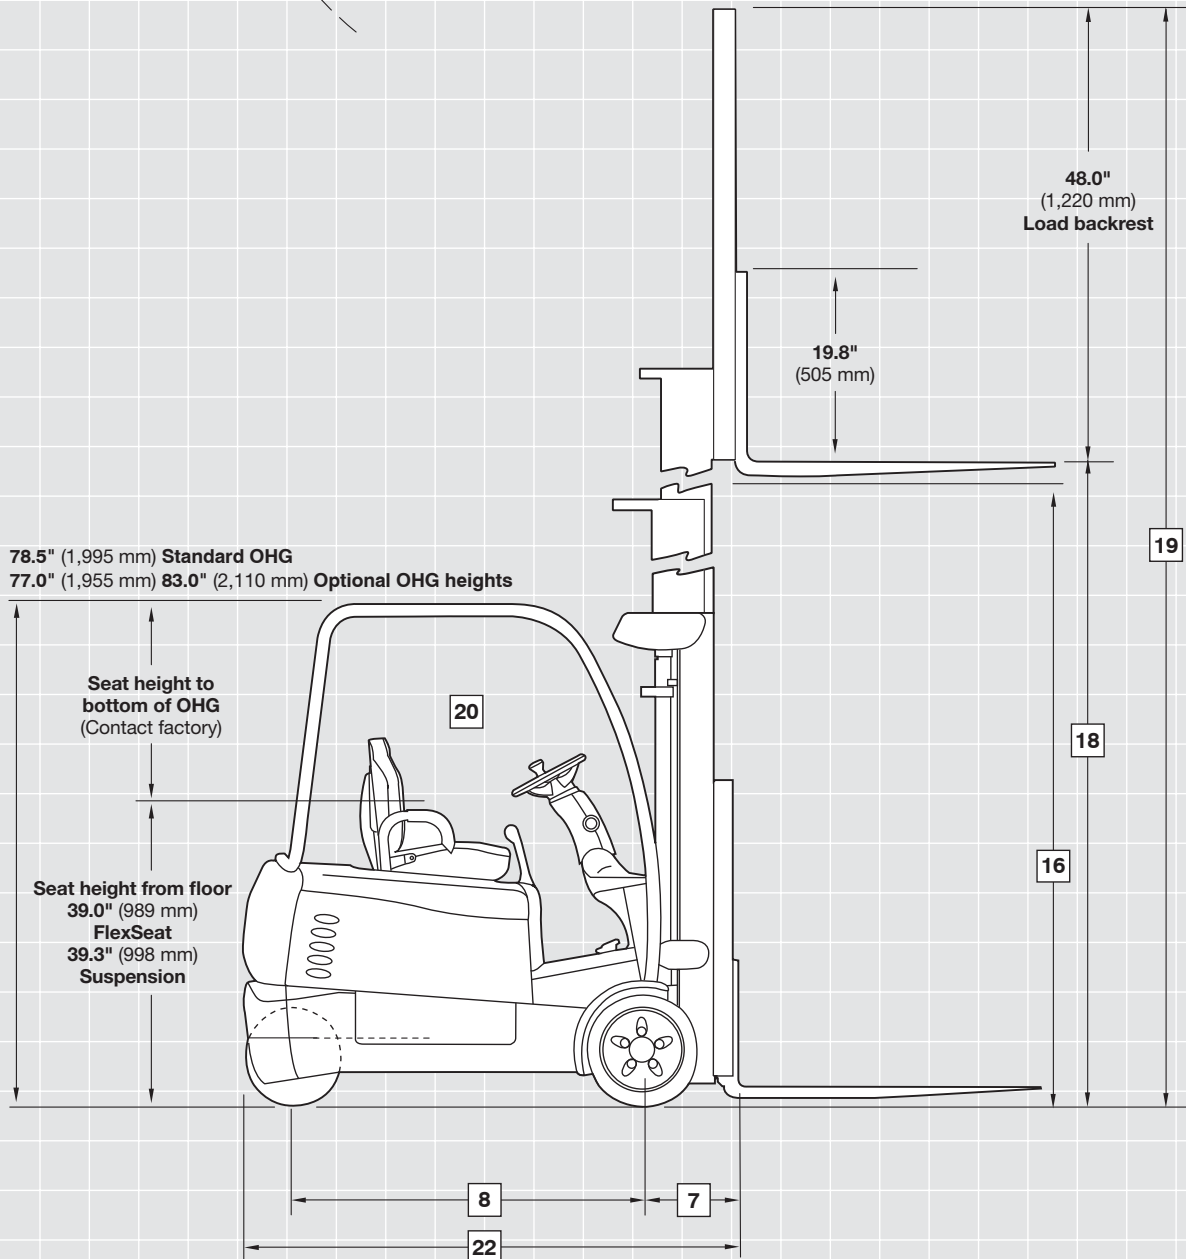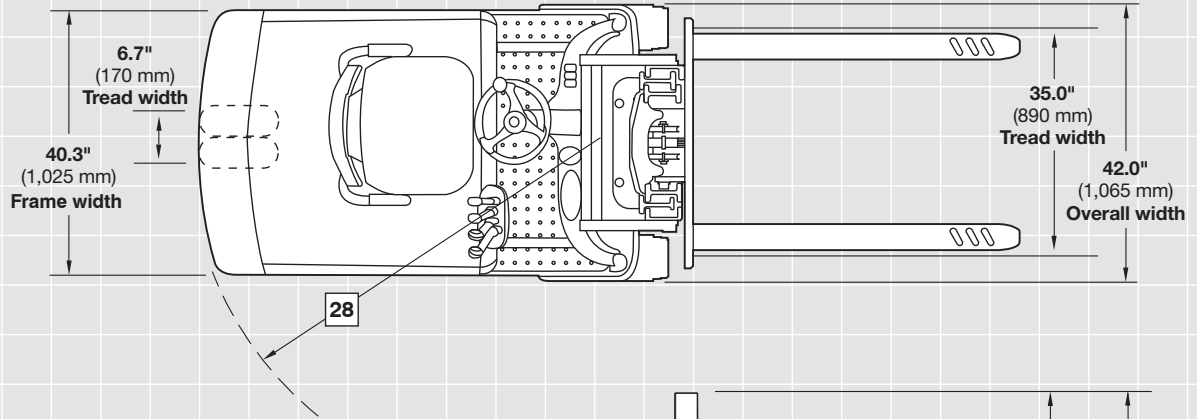

# SC 5700 Series

# Specifications

			<i>Imperial</i>	<i>Metric</i>	<i>Imperial</i>	<i>Metric</i>		
General Information	1	Manufacturer	Crown Equipment Corporation					
	2	Model	SC 5715-30		SC 5725-30			
	3	Power (fuel) type	Electric, diesel, gas, LPG					
	4	Operator Type	Electric					
	5	Load Capacity	lb kg	3,000	1,360	3,000	1,360	
	6	Load Centre	Per ANSI B56.1	in mm	24	600	24	600
	7	Load Distance	TT Mast, Forks only	in mm	14.3	365	14.3	365
	8	Wheelbase		in mm	46.2	1,175	50.5	1,285
Weights	9	Truck Weight	lb kg	Contact Factory				
	9.1	Axle Load, Loaded	lb kg	Contact Factory				
	9.2	Axle Load, Empty	lb kg	Contact Factory				
Tyres	10	Tyre Type	Cushion, Solid Pneumatic, Air-filled Pneumatic					
	11	Tyre Size, Front	in mm	18 x 7 x 12.1	457 x 178 x 307	18 x 7 x 12.1	457 x 178 x 307	
	12	Tyre Size, Rear	in mm	15 x 5 x 11.25	381 x 127 x 286	15 x 5 x 11.25	381 x 127 x 286	
	13	Wheels	Number (x = driven) Front/Rear					
14	Tread Width	Standard, Front/Rear	in mm	35/6.7	890/170	35/6.7	890/170	
Dimensions	15	Mast	Tilt	deg deg	See Mast Charts			
	16		Collapsed Height	in mm				
	17		Free Lift	in mm				
	18		Lift Height	in mm				
	19		Extended Height	in mm				
	20	Overhead Guard Height	in mm	See Line Drawing				
	21	Seat Height	From floor to SIP	in mm	See Line Drawing			
	21.1	Seat Height to Bottom of OHG	From SIP to Bottom of OHG	in mm	Contact Factory			
	22	Head length	TT mast, forks only	in mm	68.5	1,740	72.8	1,850
	23	Overall Width	Standard Tread	in mm	42	1,070	42	1,070
24	Forks	Standard L x W x T	in mm	36 x 4 x 1.5	915 x 102 x 38	36 x 4 x 1.5	915 x 102 x 38	
25	Fork Carriage		in mm	ITA Class II				
26	Ground Clearance	Loaded Below Mast	in mm	3	75	3	75	
26.1		Center of Wheelbase	in mm	4.8	120	5	125	
27	Working Aisle Width	Minimum non-intrusive right-angle stack	in mm	Calculate using RAS Calculator				
28	Turning Radius	TT Mast, Forks only	in mm	54.2	1,380	58.5	1,490	
Performance	29	Travel Speed, Forks First	36 V, Loaded/Empty	mph km/h	7.6/8.5	12.2/13.6	7.6/8.5	12.2/13.6
	29.1		48 V, Loaded/Empty	mph km/h	8.9/10	14.3/16	8.9/10	14.3/16
	30	Travel Speed, Power Unit First	36 V, Loaded/Empty	mph km/h	7.6/8.5	12.2/13.6	7.6/8.5	12.2/13.6
	30.1		48 V, Loaded/Empty	mph km/h	8.9/10	14.3/16	8.9/10	14.3/16
	31	Lift Speed	36 V, Loaded/Empty	fpm m/s	72/110	0.37/0.56	72/110	0.37/0.56
	31.1		48 V, Loaded/Empty	fpm m/s	77/110	0.39/0.56	77/110	0.39/0.56
	32	Lowering Speed	Standard, Loaded/Empty	fpm m/s	100/90	0.51/0.46	100/90	0.51/0.46
	32.1		Bionic Controls, Loaded/Empty	fpm m/s	98/98	0.50/0.50	98/98	0.50/0.50
	33	Drawbar Pull	Loaded/Empty (60 min. rating)	lbf N	Contact Factory			
	34	Gradeability	Loaded/Empty (30 min. rating)	% %	Contact Factory			
	35	Brake	Service/Park		Foot - Motor/Auto - Electro-mechanical			
Motors/Batteries	36	Traction Motor	36 V, 60 min. rating	hp kW	6.4 2x	4.8 2x	6.4 2x	4.8 2x
	36.1		48 V, 60 min. rating	hp kW	7.4 2x	5.5 2x	7.4 2x	5.5 2x
	37	Lift Pump Motor	36 V, 15% ON time	hp kW	10.6	7.9	10.6	7.9
	37		48 V, 15% ON time	hp kW	15.0	11.2	15.0	11.2
	38	Battery Compartment	Nominal	in mm	16	406	21	533
	38.1	Max. Battery Size	Without Rollers, L x W x H	in mm	38.81 x 16.63 x 23.63	985 x 422 x 600	38.81 x 20.87 x 23.63	985 x 530 x 600
	38.2		With Rollers, L x W x H	in mm	38.81 x 16.63 x 23.13	985 x 422 x 587	985 x 422 x 587	38.81 x 20.87 x 23.13
	39	Battery Voltage/Max. Ah/Max. kWh	36 V @ 5-hour Rate	V/Ah/kWh	36 V/660 Ah/22.93 kWh		36 V/880 Ah/30.57 kWh	
	39.1		48 V @ 5-hour Rate	V/Ah/kWh	48 V/400 Ah/18.53 kWh		48 V/660 Ah/30.57 kWh	
	40	Battery Weight	Min./Max.	lb kg	1,475/1,750	670/790	1,850/2,250	840/1,020
Misc.	41	Max. Op. Pressure for Attachments		psi Bar	2,540	175	2,540	175
	42.1	Max. Hyd. Oil Flow for Attachments		gpm lpm	8	30.3	8	30.3

Dimension/performance specifications are based on a truck equipped with a 190" (4,825 mm) triple telescopic mast and standard forks only. For specific truck configuration capacities and right-angle stack dimensions, contact your local dealer.

# SC 5700 Series

# Specifications

			Imperial	Metric	Imperial	Metric		
General Information	1	Manufacturer	Crown Equipment Corporation					
	2	Model	SC 5725-35		SC 5745-35			
	3	Power (fuel) type	Electric, diesel, gas, LPG					
	4	Operator Type	Electric Sit-down Rider					
	5	Load Capacity	lb kg	3,500	1,585	3,500	1,585	
	6	Load Centre	Per ANSI B56.1	in mm	24	600	24	600
	7	Load Distance	TT Mast, Forks only	in mm	14.5	370	14.5	370
	8	Wheelbase		in mm	50.5	1,285	54.7	1,390
Weights	9	Truck Weight	Less Battery	lb kg	Contact Factory			
	9.1	Axle Load, Loaded	Front/Rear	lb kg	Contact Factory			
	9.2	Axle Load, Empty	Front/Rear	lb kg	Contact Factory			
Tyres	10	Tyre Type	Cushion, Solid Pneumatic, Air-filled Pneumatic	Cushion/Solid Pneumatic				
	11	Tyre Size, Front		in mm	18 x 7 x 12.1	457 x 178 x 307	18 x 7 x 12.1	457 x 178 x 307
	12	Tyre Size, Rear		in mm	15 x 5 x 11.25	381 x 127 x 286	15 x 5 x 11.25	381 x 127 x 286
	13	Wheels	Number (x = driven) Front/Rear	2x/2				
Dimensions	14	Tread Width	Standard, Front/Rear	in mm	35/6.7	890/170	35/6.7	890/170
	15	Mast	Tilt	deg deg	See Mast Charts			
	16		Collapsed Height	in mm				
	17		Free Lift	in mm				
	18		Lift Height	in mm				
	19		Extended Height	in mm				
	20	Overhead Guard Height		in mm	See Line Drawing			
	21	Seat Height	From floor to SIP	in mm	See Line Drawing			
	21.1	Seat Height to Bottom of OHG	From SIP to Bottom of OHG	in mm	Contact Factory			
	22	Head length	TT mast, forks only	in mm	73.0	1,855	77.2	1,960
	23	Overall Width	Standard Tread	in mm	42	1,070	42	1,070
	24	Forks	Standard L x W x T	in mm	36 x 4 x 1.75	915 x 102 x 44	36 x 4 x 1.75	915 x 102 x 44
	25	Fork Carriage		in mm	ITA Class II			
	26	Ground Clearance	Loaded Below Mast	in mm	3	75	3	75
26.1	Center of Wheelbase		in mm	5	125	5	125	
27	Working Aisle Width	Minimum non-intrusive right-angle stack	in mm	Calculate using RAS Calculator				
28	Turning Radius	TT Mast, Forks only	in mm	58.5	1,490	62.7	1,595	
Performance	29	Travel Speed, Forks First	36 V, Loaded/Empty	mph km/h	7.6/8.5	12.2/13.6	7.6/8.5	12.2/13.6
	29.1		48 V, Loaded/Empty	mph km/h	8.9/10.0	14.3/16.0	8.9/10.0	14.3/16.0
	30	Travel Speed, Power Unit First	36 V, Loaded/Empty	mph km/h	7.6/8.5	12.2/13.6	7.6/8.5	12.2/13.6
	30.1		48 V, Loaded/Empty	mph km/h	8.9/10.0	14.3/16.0	8.9/10.0	14.3/16.0
	31	Lift Speed	36 V, Loaded/Empty	fpm m/s	69/110	0.35/0.56	69/110	0.35/0.56
	31.1		48 V, Loaded/Empty	fpm m/s	75/110	0.38/0.56	75/110	0.38/0.56
	32	Lowering Speed	Standard, Loaded/Empty	fpm m/s	100/90	0.51/0.46	100/90	0.51/0.46
	32.1		Bionic Controls, Loaded/Empty	fpm m/s	98/98	0.50/0.50	98/98	0.50/0.50
	33	Drawbar Pull	Loaded/Empty (60 min. rating)	lbf N	Contact Factory			
	34	Gradeability	Loaded/Empty (30 min. rating)	% %	Contact Factory			
35	Brake	Service/Park		Foot - Motor/Auto - Electro-mechanical				
Motors/Batteries	36	Traction Motor	36 V, 60 min. rating	hp kW	6.4 2x	4.8 2x	6.4 2x	4.8 2x
	36.1		48 V, 60 min. rating	hp kW	7.4 2x	5.5 2x	7.4 2x	5.5 2x
	37	Lift Pump Motor	36 V, 15% ON time	hp kW	10.6	7.9	10.6	7.9
	37		48 V, 15% ON time	hp kW	15.0	11.2	15.0	11.2
	38	Battery Compartment	Nominal	in mm	21	533	25	635
	38.1	Max. Battery Size	Without Rollers, L x W x H	in mm	38.81 x 20.87 x 23.63	985 x 530 x 600	38.81 x 25.13 x 23.63	985 x 638 x 600
	38.2		With Rollers, L x W x H	in mm	38.81 x 20.87 x 23.13	985 x 530 x 587	38.81 x 25.13 x 23.13	985 x 638 x 587
	39	Battery Voltage/Max. Ah/Max. kWh	36 V @ 5-hour Rate	V/Ah/kWh	36 V/880 Ah/30.57 kWh		36 V/1,100 Ah/38.21 kWh	
	39.1		48 V @ 5-hour Rate	V/Ah/kWh	48 V/660 Ah/30.57 kWh		48 V/770 Ah/35.67 kWh	
	40	Battery Weight	Min./Max.	lb kg	1,850/2,250	840/1,020	2,250/2,600	1,025/1,175
Misc.	41	Max. Op. Pressure for Attachments		psi Bar	2,540	175	2,540	175
	42.1	Max. Hyd. Oil Flow for Attachments		gpm lpm	8	30.3	8	30.3

Dimension/performance specifications are based on a truck equipped with a 190" (4,825 mm) triple telescopic mast and standard forks only. For specific truck configuration capacities and right-angle stack dimensions, contact your local dealer.

			Imperial	Metric
General Information	1	Manufacturer	Crown Equipment Corporation	
	2	Model	SC 5745-40	
	3	Power (fuel) type	Electric, diesel, gas, LPG	
	4	Operator Type	Electric	
	5	Load Capacity	lb kg	4,000 1,810
	6	Load Centre	Per ANSI B56.1 in mm	24 600
	7	Load Distance	TT Mast, Forks only in mm	14.5 370
	8	Wheelbase	in mm	54.7 1,390
Weights	9	Truck Weight	Less Battery lb kg Contact Factory	
	9.1	Axle Load, Loaded	Front/Rear lb kg Contact Factory	
	9.2	Axle Load, Empty	Front/Rear lb kg Contact Factory	
Tyres	10	Tyre Type	Cushion, Solid Pneumatic, Air-filled Pneumatic	
	11	Tyre Size, Front	in mm	18 x 7 x 12.1 457 x 178 x 307
	12	Tyre Size, Rear	in mm	15 x 5 x 11.25 381 x 127 x 286
	13	Wheels	Number (x = driven) Front/Rear	2x/2
	14	Tread Width	Standard, Front/Rear in mm	35/6.7 890/170
Dimensions	15	Mast	Tilt deg deg	See Mast Charts
	16		Collapsed Height in mm	
	17		Free Lift in mm	
	18		Lift Height in mm	
	19		Extended Height in mm	
	20	Overhead Guard Height	in mm	See Line Drawing
	21	Seat Height	From floor to SIP in mm	See Line Drawing
	21.1	Seat Height to Bottom of OHG	From SIP to Bottom of OHG in mm	Contact Factory
	22	Head length	TT mast, forks only in mm	77.2 1,960
	23	Overall Width	Standard Tread in mm	42 1,070
24	Forks	Standard L x W x T in mm	36 x 4 x 1.75 915 x 102 x 44	
25	Fork Carriage	in mm	ITA Class II	
26	Ground Clearance	Loaded Below Mast in mm	3 75	
26.1		Center of Wheelbase in mm	5 125	
27	Working Aisle Width	Minimum non-intrusive right-angle stack in mm	Calculate using RAS Calculator	
28	Turning Radius	TT Mast, Forks only in mm	62.7 1,595	
Performance	29	Travel Speed, Forks First	36 V, Loaded/Empty mph km/h	7.6/8.5 12.2/13.6
	29.1		48 V, Loaded/Empty mph km/h	8.9/10.0 14.3/16.0
	30	Travel Speed, Power Unit First	36 V, Loaded/Empty mph km/h	7.6/8.5 12.2/13.6
	30.1		48 V, Loaded/Empty mph km/h	8.9/10.0 14.3/16.0
	31	Lift Speed	36 V, Loaded/Empty fpm m/s	67/110 0.34/0.56
	31.1		48 V, Loaded/Empty fpm m/s	73/110 0.37/0.56
	32	Lowering Speed	Standard, Loaded/Empty fpm m/s	100/90 0.51/0.46
	32.1		Bionic Controls, Loaded/Empty fpm m/s	98/98 0.50/0.50
	33	Drawbar Pull	Loaded/Empty (60 min. rating) lbf N	Contact Factory
	34	Gradeability	Loaded/Empty (30 min. rating) % %	Contact Factory
35	Brake	Service/Park	Foot - Motor/Auto - Electro-mechanical	
Motors/Batteries	36	Traction Motor	36 V, 60 min. rating hp kW	6.4 2x 4.8 2x
	36.1		48 V, 60 min. rating hp kW	7.4 2x 5.5 2x
	37	Lift Pump Motor	36 V, 15% ON time hp kW	10.6 7.9
	37		48 V, 15% ON time hp kW	15.0 11.2
	38	Battery Compartment	Nominal in mm	25 635
	38.1	Max. Battery Size	Without Rollers, L x W x H in mm	38.81 x 16.63 x 23.63 985 x 422 x 600
	38.2		With Rollers, L x W x H in mm	38.81 x 25.13 x 23.13 985 x 638 x 587
	39	Battery Voltage/Max. Ah/Max. kWh	36 V @ 5-hour Rate V/Ah/kWh	36 V/1,100 Ah/38.21 kWh
	39.1		48 V @ 5-hour Rate V/Ah/kWh	48 V/770 Ah/35.67 kWh
	40	Battery Weight	Min./Max. lb kg	2,250/2,600 1,025/1,175
Misc.	41	Max. Op. Pressure for Attachments	psi Bar	2,540 175
	42.1	Max. Hyd. Oil Flow for Attachments	gpm lpm	8 30.3

Dimension/performance specifications are based on a truck equipped with a 190" (4,825 mm) triple telescopic mast and standard forks only. For specific truck configuration capacities and right-angle stack dimensions, contact your local dealer.

Mast Chart			TL - Truckers Mast											
Dimensions	16	Collapsed Height	in mm	54.0	1,370	58.0	1,470	60.0	1,520	61.0	1,545	76.0	1,930	
	18	Lift Height	in mm	68.0	1,725	76.0	1,930	80.0	2,030	82.0	2,080	112.0	2,840	
	19	Extended Height <sup>1</sup>	in mm	116.5	2,955	124.5	3,155	128.0	3,255	130.0	3,305	160.5	4,075	
	15	Tilt (B/F) Std. OHG	deg	5/5		5/5		5/5		5/5		5/5		
	15.1	Tilt (B/F) Drive-in Rack OHG	deg	5/5		5/5		5/5		5/5		5/5		

1. Includes 48" (1,219-mm) tall load backrest

Mast Chart			TL - Limited Free Lift Mast											
Dimensions	16	Collapsed Height	in mm	77.0	1,955	83.0	2,105	89.0	2,260	95.0	2,410	100.0	2,540	
	18	Lift Height	in mm	114.0	2,895	126.0	3,200	138.0	3,505	150.0	3,810	160.0	4,060	
	19	Extended Height <sup>1</sup>	in mm	162.5	4,125	174.5	4,425	186.5	4,735	198.5	5,035	208.5	5,295	
	15	Tilt (B/F) Std. OHG	deg	5/5		5/5		5/5		3/5		3/5		
	15.1	Tilt (B/F) Drive-in Rack OHG	deg	3/5		5/5		5/5		3/5		3/5		

1. Includes 48" (1,219-mm) tall load backrest

Mast Chart			TF - Free Lift Mast											
Dimensions	16	Collapsed Height	in mm	77.0	1,955	83.0	2,105	89.0	2,260	95.0	2,410	100.0	2,540	
	18	Lift Height	in mm	117.0	2,970	129.0	3,275	141.0	3,580	153.0	3,885	163.0	4,140	
	17	Free Lift Height <sup>1</sup>	in mm	29.0	735	35.0	885	41.0	1,040	47.0	1,190	52.0	1,320	
	19	Extended Height <sup>1</sup>	in mm	166.0	4,215	178.0	4,515	190.0	4,825	202.0	5,125	212.0	5,385	
	15	Tilt (B/F) <sup>2</sup> Std. OHG	deg	5/5		5/5		5/5		3/5		3/5		
	15.1	Tilt (B/F) <sup>2</sup> Drive-in Rack OHG	deg	3/5		5/5		5/5		3/5		3/5		

1. Includes 48" (1,219-mm) tall load backrest

2. Tilt listed is when below tilt interlock height

Mast Chart			TT - Triple Telescopic Mast											
Dimensions	16	Collapsed Height	in mm	77.0	1,955	83.0	2,105	89.0	2,260	95.0	2,410	100.0	2,540	
	18	Lift Height	in mm	172.0	4,365	190.0	4,825	208.0	5,280	226.0	5,740	241.0	6,120	
	17	Free Lift Height <sup>1</sup>	in mm	29.0	735	35.0	885	41.0	1,040	47.0	1,190	52.0	1,320	
	19	Extended Height <sup>1</sup>	in mm	220.5	5,600	238.5	6,050	256.5	6,515	274.5	6,965	289.5	7,355	
	15	Tilt (B/F) <sup>2</sup> Std. OHG	deg	5/5		5/5		5/5		3/5		3/5		
	15.1	Tilt (B/F) <sup>2</sup> Drive-in Rack OHG	deg	3/5		5/5		5/5		3/5		3/5		

1. Includes 48" (1,219-mm) tall load backrest

2. Tilt listed is when below tilt interlock height

Mast Chart			QUAD											
Dimensions	16	Collapsed Height	in mm	83.0	2,105	86.0	2,185	89.0	2,265	92.0	2,340	95.0	2,415	
	18	Lift Height	in mm	240.0	6,095	246.0	6,245	258.0	6,550	264.0	6,705	276.0	7,010	
	17	Free Lift Height <sup>1</sup>	in mm	35.0	885	38.0	960	41.0	1,040	44.0	1,115	47.0	1,190	
	19	Extended Height <sup>1</sup>	in mm	288.5	7,330	294.5	7,485	306.5	7,790	312.5	7,940	324.5	8,245	
	15	Tilt (B/F) <sup>2</sup> Std. OHG	deg	3/5		3/5		3/5		3/5		3/5		
	15.1	Tilt (B/F) <sup>2</sup> Drive-in Rack OHG	deg	3/5		3/5		3/5		3/5		3/5		

1. Includes 48" (1,219-mm) tall load backrest

2. Tilt listed is when below tilt interlock height



**Standard Equipment**

1. Crown's Access 1 2 3 Comprehensive System Control
2. 36-volt system
3. AC traction and hydraulic systems
4. Crown-manufactured traction and hydraulic motors
5. Sealed rack and pinion steering
6. Intrinsic Stability System
  - System-controlled hydraulics
  - Travel and cornering speed control
  - Tilt Interlock
  - Stability-enhanced counterweight
  - Intelligent ramp control
7. e-GEN braking system with automatic parking brake
8. Crown FlexSeat - fabric with hip restraint and anti-cinch seatbelt
9. Extended steering wheel column with infinite adjustment
10. Manual hydraulic control levers
11. Crown Display
  - Battery discharge indicator with lift interrupt and re-key feature
  - Hour meters
  - User code ready
  - Event code indicator and notification
  - P1, P2, & P3 performance modes
  - Access 1 2 3 service menus
12. 13"-diameter steering wheel
13. SB 350 battery connector
14. InfoPoint System Maps
15. 48" (1,220 mm) high-load backrest
16. 5° forward tilt
17. On-demand power steering
18. Lift interrupt
19. Lift-out or side battery removal access
20. Cushion, smooth rubber tyres
21. Keyswitch On/Off
22. Class II Hang-on fork carriage

**Optional Equipment**

1. TL Truckers, TL, TF, TT and QUAD masts
2. Mast stops and lift limit options
3. 7° & 10° forward tilt
4. Crown integral sideshifter
5. Factory-installed attachments
  - Hang-on sideshifter
  - Fork positioners
  - Push/pulls
6. Additional load backrest heights
7. Additional fork lengths
8. Partial and fully tapered forks
9. 48-volt electrical system
10. Alternate Power Sources
  - V-Force Li-ion Ready
11. Battery rollers
12. Battery retainer switch
13. Additional battery connectors
14. Opportunity Charging
  - Quick charge – 1 connector on seat deck
  - Fast charge – 2 connectors on seat deck
15. Additional Tyre options
  - Cushion, smooth non-marking rubber tyres
  - Cushion, smooth rubber tyres
  - Cushion, lugged non-marking rubber tyres
  - Solid pneumatic
  - Solid pneumatic – non-marking

16. Drive-in Rack OHGs
17. OHG Top covers
  - Wire mesh
  - Plexiglass
  - Expanded metal
18. Additional seat options
  - Crown FlexSeat – vinyl
  - Suspension seat – fabric or vinyl
19. D4 Arm rest
20. Bionic hydraulic controls
  - Fingertip
  - Mini-lever
  - Dual-lever
  - Combination
21. Additional seatbelts
  - Orange Hi-vis seatbelt
  - Orange Hi-vis seatbelt with interlock
22. Foot operated directional control
23. Single or double accy hydraulic functions
24. Hydraulic quick disconnects
25. Pressure gauge and regulator
26. 5th Function hydraulics
27. Rearview mirrors
28. Light packages
  - Brake, back-up, and rear light package
  - Turn signals
29. Floor spot lights
30. Flashing lights
31. Front and rear worklights – LED or Halogen
32. Travel alarms

33. WorkAssist Options
  - Operator fans
  - Clip Pad and Hook
  - Clip Pad
  - Hook
  - Accessory Clamp
  - Accessory Clamp and Mounting Plate
  - Shrink Wrap Holder
  - Storage Net
  - Cup holder
  - Pockets
  - Organisation kits
  - Orange storage pocket
  - Rear storage bin
34. Productivity Options
  - InfoLink Ready
  - Tilt position assist
  - Traction motor cooling fan
35. Miscellaneous Options
  - B-post handle with horn button
  - Floor Mounted Horn Button
  - Accessory Cable
  - Keyless On/Off Switch
  - Keypad
  - Steering wheel spinner knob
  - Fire Extinguisher
  - LH Grab handle
  - 10"-diameter steering wheel with spinner knob
36. Environmental Packages
  - EE Rating
  - Corrosion package
  - Freezer package



**Crown Equipment Corporation**  
New Bremen, Ohio 45869, USA  
**Tel** 419-629-2311  
**Fax** +1 419 629 3796  
[crown.com](http://crown.com)

Crown is continually improving its products, so specifications are subject to change without notice.

Crown, the Crown logo, the colour beige, the Momentum symbol, Access 1 2 3, InfoPoint, e-GEN, Intrinsic Stability System, FlexSeat, InfoLink, V-Force and Work Assist are trademarks of Crown Equipment Corporation in the United States and other countries.

Copyright 2011-2022 Crown Equipment Corporation  
SF14690-EM Rev. 01-22  
Printed in the USA.