



CROWN

SC 5700 SERIES

Specifications
Sit-Down Rider Lift Truck

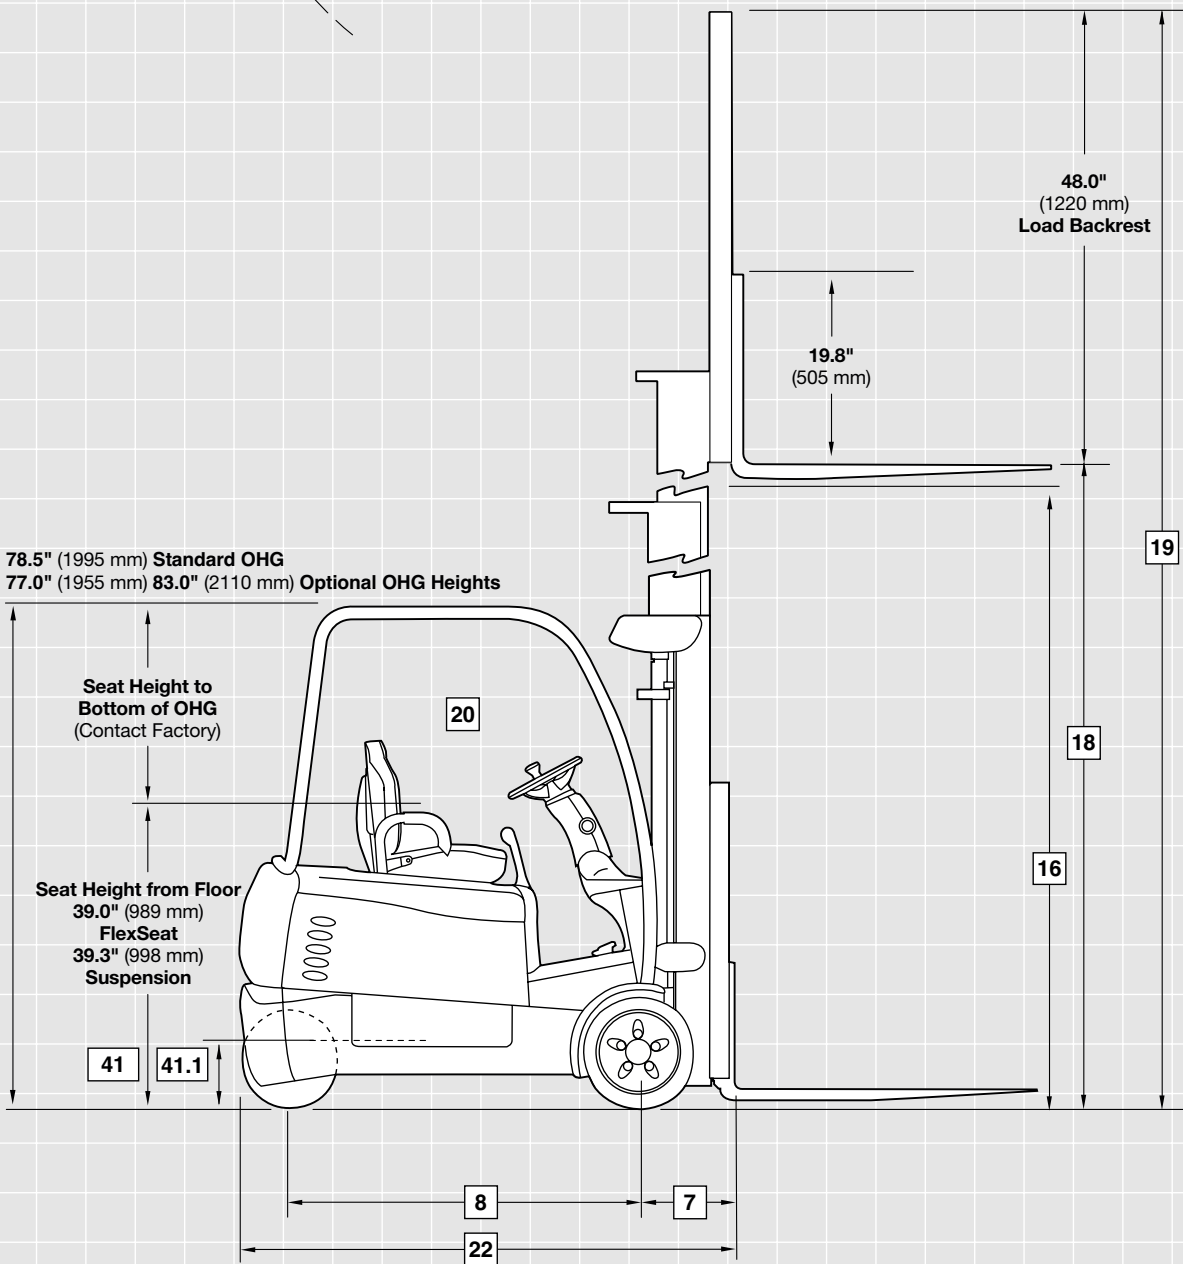

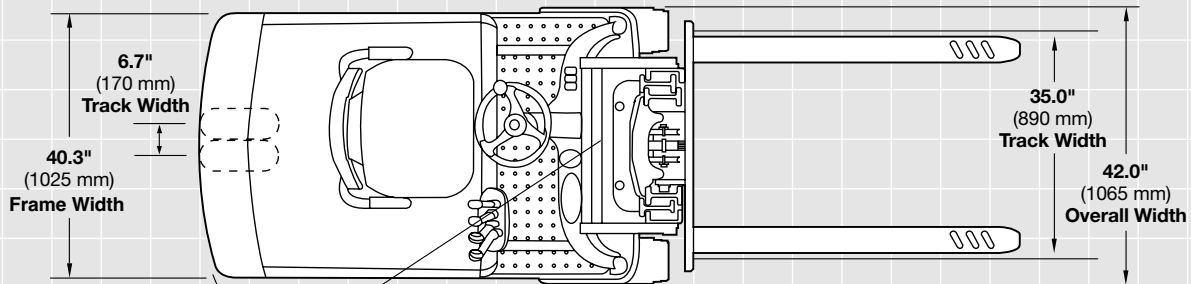

SC 5700 Series

Specifications

			Imperial	Metric	Imperial	Metric		
General Information	1	Manufacturer	Crown Equipment Corporation					
	2	Model	SC 5715-30		SC 5725-30			
	3	Power (Fuel) Type	Electric					
	4	Operator Type	Sit-down Rider					
	5	Load Capacity	lb kg	3,000	1360	3,000	1360	
	6	Load Center	Per ANSI B56.1	in mm	24	600	24	600
	7	Load Distance	TT Mast, Forks only	in mm	14.3	365	14.3	365
	8	Wheelbase		in mm	46.2	1175	50.5	1285
Weights	9	Truck Weight	Less Battery	lb kg	Contact Factory			
	9.1	Axle Load, Loaded	Front / Rear	lb kg	Contact Factory			
	9.2	Axle Load, Empty	Front / Rear	lb kg	Contact Factory			
Tires	10	Tire Type	Cushion / Solid Pneumatic					
	11	Tire Size, Front	in mm	18 x 7 x 12.1	457 x 178 x 307	18 x 7 x 12.1	457 x 178 x 307	
	12	Tire Size, Rear	in mm	15 x 5 x 11.25	381 x 127 x 286	15 x 5 x 11.25	381 x 127 x 286	
	13	Wheels	Number (x = driven) Front / Rear					
	14	Track Width	Standard, Front / Rear	in mm	35 / 6.7	890 / 170	35 / 6.7	890 / 170
Dimensions	15	Mast	Tilt	deg deg	See Mast Charts			
	16		Collapsed Height	in mm				
	17		Free Lift	in mm				
	18		Lift Height	in mm				
	19		Extended Height	in mm				
	20	Overhead Guard Height	in mm	See Line Drawing				
	21	Seat Height	From floor to SIP	in mm	See Line Drawing			
	21.1	Seat Height to Bottom of OHG	From SIP to Bottom of OHG	in mm	Contact Factory			
	22	Headlength	TT mast, forks only	in mm	68.5	1740	72.8	1850
	23	Overall Width	Standard Tread	in mm	42	1070	42	1070
	24	Forks	Standard L x W x T	in mm	36 x 4 x 1.5	915 x 102 x 38	36 x 4 x 1.5	915 x 102 x 38
25	Fork Carriage		in mm	ITA Class II				
26	Ground Clearance	Loaded Below Mast	in mm	3	75	3	75	
26.1		Center of Wheelbase	in mm	4.8	120	5	125	
27	Working Aisle Width	Minimum non-intrusive right angle stack	in mm	Calculate using RAS Calculator				
28	Turning Radius	TT Mast, Forks only	in mm	54.2	1380	58.5	1490	
Performance	29	Travel Speed, Forks First	36V, Loaded / Empty	mph km/h	7.6 / 8.5	12.2 / 13.6	7.6 / 8.5	12.2 / 13.6
	29.1		48V, Loaded / Empty	mph km/h	8.9 / 10	14.3 / 16	8.9 / 10	14.3 / 16
	30	Travel Speed, Power Unit First	36V, Loaded / Empty	mph km/h	7.6 / 8.5	12.2 / 13.6	7.6 / 8.5	12.2 / 13.6
	30.1		48V, Loaded / Empty	mph km/h	8.9 / 10	14.3 / 16	8.9 / 10	14.3 / 16
	31	Lift Speed	36V, Loaded / Empty	fpm m/s	72 / 110	0.37 / 0.56	72 / 110	0.37 / 0.56
	31.1		48V, Loaded / Empty	fpm m/s	77 / 110	0.39 / 0.56	77 / 110	0.39 / 0.56
	32	Lowering Speed	Standard, Loaded / Empty	fpm m/s	100 / 90	0.51 / 0.46	100 / 90	0.51 / 0.46
	32.1		Bionic Controls, Loaded / Empty	fpm m/s	98 / 98	0.50 / 0.50	98 / 98	0.50 / 0.50
	33	Drawbar Pull	Loaded / Empty (60 min. rating)	lbf N	Contact Factory			
	34	Gradeability	Loaded / Empty (30 min. rating)	% %	Contact Factory			
35	Brake	Service / Park		Foot - Motor / Auto - Electro-mechanical				
Motors/Batteries	36	Traction Motor	36V, 60 min. rating	hp kW	6.4 2x	4.8 2x	6.4 2x	4.8 2x
	36.1		48V, 60 min. rating	hp kW	7.4 2x	5.5 2x	7.4 2x	5.5 2x
	37	Lift Motor	36V, 15% ON time	hp kW	10.6	7.9	10.6	7.9
	37.1		48V, 15% ON time	hp kW	15.0	11.2	15.0	11.2
	38	Battery Compartment	Nominal	in mm	16	406	21	533
	38.1	Max. Battery Size	Without Rollers, L x W x H	in mm	38.8 x 16.6 x 23.6	985 x 422 x 600	38.8 x 20.8 x 23.6	985 x 530 x 600
	38.2		With Rollers, L x W x H	in mm	38.8 x 16.6 x 23.1	985 x 422 x 587	38.8 x 20.8 x 23.1	985 x 422 x 587
	39	Battery Voltage / Max. Ah / Max. kWh	36V @ 5 hour Rate	V / Ah / kWh	36V / 660Ah / 22.93kWh			36V / 880Ah / 30.57kWh
	39.1		48V @ 5 hour Rate	V / Ah / kWh	48V / 400Ah / 18.53kWh			48V / 660Ah / 30.57kWh
	40	Battery Weight	Min. / Max.	lb kg	1,475 / 1,750	670 / 790	1,850 / 2,250	840 / 1020
41	Battery Floor Height	With Rollers	in mm	10.4	264	10.4	264	
41.1		Without Rollers	in mm	9.8	249	9.8	249	
Misc.	42	Max. Op. Pressure for Attachments	psi Bar	2,540	175	2,540	175	
	43	Max. Hyd. Oil Flow for Attachments	gpm lpm	8	30.3	8	30.3	

Dimension / performance specifications are based on a truck equipped with a 190" (4825 mm) triple telescopic mast and standard forks only. For specific truck configuration capacities and right angle stack dimensions, contact your local dealer.

SC 5700 Series

Specifications

			Imperial	Metric	Imperial	Metric		
General Information	1	Manufacturer	Crown Equipment Corporation					
	2	Model	SC 5725-35		SC 5745-35			
	3	Power (Fuel) Type	Electric					
	4	Operator Type	Sit-down Rider					
	5	Load Capacity	lb kg	3,500	1585	3,500	1585	
	6	Load Center	Per ANSI B56.1	in mm	24	600	24	600
	7	Load Distance	TT Mast, Forks only	in mm	14.5	370	14.5	370
	8	Wheelbase		in mm	50.5	1285	54.7	1390
Weights	9	Truck Weight	Less Battery	lb kg	Contact Factory			
	9.1	Axle Load, Loaded	Front / Rear	lb kg	Contact Factory			
	9.2	Axle Load, Empty	Front / Rear	lb kg	Contact Factory			
Tires	10	Tire Type	Cushion, Solid Pneumatic, Air-filled Pneumatic					
	11	Tire Size, Front	in mm	18 x 7 x 12.1	457 x 178 x 307	18 x 7 x 12.1	457 x 178 x 307	
	12	Tire Size, Rear	in mm	15 x 5 x 11.25	381 x 127 x 286	15 x 5 x 11.25	381 x 127 x 286	
	13	Wheels	Number (x = driven) Front/Rear	2x / 2				
	14	Track Width	Standard, Front / Rear	in mm	35 / 6.7	890 / 170	35 / 6.7	890 / 170
Dimensions	15	Mast	Tilt	deg deg	See Mast Charts			
	16		Collapsed Height	in mm				
	17		Free Lift	in mm				
	18		Lift Height	in mm				
	19		Extended Height	in mm				
	20	Overhead Guard Height	in mm	See Line Drawing				
	21	Seat Height	From floor to SIP	in mm	See Line Drawing			
	21.1	Seat Height to Bottom of OHG	From SIP to Bottom of OHG	in mm	Contact Factory			
	22	Headlength	TT mast, forks only	in mm	73.0	1855	77.2	1960
	23	Overall Width	Standard Tread	in mm	42	1070	42	1070
24	Forks	Standard L x W x T	in mm	36 x 4 x 1.75	915 x 102 x 44	36 x 4 x 1.75	915 x 102 x 44	
25	Fork Carriage		in mm	ITA Class II				
26	Ground Clearance	Loaded Below Mast	in mm	3	75	3	75	
26.1		Center of Wheelbase	in mm	5	125	5	125	
27	Working Aisle Width	Minimum non-intrusive right angle stack	in mm	Calculate using RAS Calculator				
28	Turning Radius	TT Mast, Forks only	in mm	58.5	1490	62.7	1595	
Performance	29	Travel Speed, Forks First	36V, Loaded / Empty	mph km/h	7.6 / 8.5	12.2 / 13.6	7.6 / 8.5	12.2 / 13.6
	29.1		48V, Loaded / Empty	mph km/h	8.9 / 10.0	14.3 / 16.0	8.9 / 10.0	14.3 / 16.0
	30	Travel Speed, Power Unit First	36V, Loaded / Empty	mph km/h	7.6 / 8.5	12.2 / 13.6	7.6 / 8.5	12.2 / 13.6
	30.1		48V, Loaded / Empty	mph km/h	8.9 / 10.0	14.3 / 16.0	8.9 / 10.0	14.3 / 16.0
	31	Lift Speed	36V, Loaded / Empty	fpm m/s	69 / 110	0.35 / 0.56	69 / 110	0.35 / 0.56
	31.1		48V, Loaded / Empty	fpm m/s	75 / 110	0.38 / 0.56	75 / 110	0.38 / 0.56
	32	Lowering Speed	Standard, Loaded / Empty	fpm m/s	100 / 90	0.51 / 0.46	100 / 90	0.51 / 0.46
	32.1		Bionic Controls, Loaded / Empty	fpm m/s	98 / 98	0.50 / 0.50	98 / 98	0.50 / 0.50
	33	Drawbar Pull	Loaded / Empty (60 min. rating)	lbf N	Contact Factory			
	34	Gradeability	Loaded / Empty (30 min. rating)	% %	Contact Factory			
35	Brake	Service / Park		Foot - Motor / Auto - Electro-mechanical				
Motors/Batteries	36	Traction Motor	36V, 60 min. rating	hp kW	6.4 2x	4.8 2x	6.4 2x	4.8 2x
	36.1		48V, 60 min. rating	hp kW	7.4 2x	5.5 2x	7.4 2x	5.5 2x
	37	Lift Motor	36V, 15% ON time	hp kW	10.6	7.9	10.6	7.9
	37.1		48V, 15% ON time	hp kW	15.0	11.2	15.0	11.2
	38	Battery Compartment	Nominal	in mm	21	533	25	635
	38.1	Max. Battery Size	Without Rollers, L x W x H	in mm	38.8 x 20.8 x 23.6	985 x 530 x 600	38.8 x 25.1 x 23.6	985 x 638 x 587
	38.2		With Rollers, L x W x H	in mm	38.8 x 20.8 x 23.1	985 x 530 x 587	38.8 x 25.1 x 23.1	985 x 638 x 587
	39	Battery Voltage / Max. Ah / Max. kWh	36V @ 5 hour Rate	V / Ah / kWh	36V / 880Ah / 30.57kWh		36V / 1100Ah / 38.21kWh	
	39.1		48V @ 5 hour Rate	V / Ah / kWh	48V / 660Ah / 30.57kWh		48V / 770Ah / 35.67kWh	
	40	Battery Weight	Min. / Max.	lb kg	1,850 / 2,250	840 / 1020	2,250 / 2,600	1025 / 1175
41	Battery Floor Height	With Rollers	in mm	10.4	264	10.4	264	
41.1		Without Rollers	in mm	9.8	249	9.8	249	
Misc.	42	Max. Op. Pressure for Attachments		psi Bar	2,540	175	2,540	175
	43	Max. Hyd. Oil Flow for Attachments		gpm lpm	8	30.3	8	30.3

Dimension / performance specifications are based on a truck equipped with a 190" (4825 mm) triple telescopic mast and standard forks only. For specific truck configuration capacities and right angle stack dimensions, contact your local dealer.

SC 5700 Series

Specifications

			<i>Imperial</i>	<i>Metric</i>		
General Information	1	Manufacturer	Crown Equipment Corporation			
	2	Model	SC 5745-40			
	3	Power (Fuel) Type	Electric, Diesel, Gas, LPG			
	4	Operator Type	Electric			
	5	Load Capacity	Sit-down Rider			
	6	Load Center	lb kg	4,000	1810	
	7	Load Distance	Per ANSI B56.1	in mm	24	600
	8	Wheelbase	TT Mast, Forks only	in mm	14.5	370
Weights	9	Truck Weight	in mm	54.7	1390	
	9.1	Axle Load, Loaded	lb kg	Less Battery		
	9.2	Axle Load, Empty	lb kg	Front / Rear		
Tires	10	Tire Type	Cushion, Solid Pneumatic, Air-filled Pneumatic			
	11	Tire Size, Front	in mm	18 x 7 x 12.1	457 x 178 x 307	
	12	Tire Size, Rear	in mm	15 x 5 x 11.25	381 x 127 x 286	
	13	Wheels	Number (x = driven) Front / Rear			
	14	Track Width	in mm	35 / 6.7	890 / 170	
Dimensions	15	Mast	Tilt	deg deg	See Mast Charts	
	16		Collapsed Height	in mm		
	17		Free Lift	in mm		
	18		Lift Height	in mm		
	19		Extended Height	in mm		
	20	Overhead Guard Height	in mm	See Line Drawing		
	21	Seat Height	in mm	From floor to SIP		
	21.1	Seat Height to Bottom of OHG	in mm	From SIP to Bottom of OHG		
	22	Headlength	in mm	77.2	1960	
	23	Overall Width	in mm	42	1070	
Performance	24	Forks	in mm	36 x 4 x 1.75	915 x 102 x 44	
	25	Fork Carriage	in mm	Standard L x W x T		
	26	Ground Clearance	in mm	3	75	
	26.1		Center of Wheelbase	in mm	5	125
	27	Working Aisle Width	in mm	Loaded Below Mast		
	28	Turning Radius	in mm	62.7	1595	
	29	Travel Speed, Forks First	mph km/h	7.6 / 8.5	12.2 / 13.6	
	29.1		mph km/h	8.9 / 10.0	14.3 / 16.0	
	30	Travel Speed, Power Unit First	mph km/h	7.6 / 8.5	12.2 / 13.6	
	30.1		mph km/h	8.9 / 10.0	14.3 / 16.0	
31	Lift Speed	fpm m/s	67 / 110	0.34 / 0.56		
31.1		fpm m/s	73 / 110	0.37 / 0.56		
32	Lowering Speed	fpm m/s	100 / 90	0.51 / 0.46		
32.1		fpm m/s	98 / 98	0.50 / 0.50		
33	Drawbar Pull	lbf N	Loaded / Empty (60 min. rating)			
34	Gradeability	% %	Loaded / Empty (30 min. rating)			
35	Brake	Service / Park		Foot - Motor / Auto - Electro-mechanical		
Motors/Batteries	36	Traction Motor	hp kW	6.4 2x	4.8 2x	
	36.1		hp kW	7.4 2x	5.5 2x	
	37	Lift Motor	hp kW	10.6	7.9	
	37.1		hp kW	15.0	11.2	
	38	Battery Compartment	in mm	25	635	
	38.1	Max. Battery Size	in mm	38.8 x 25.1 x 23.6	985 x 638 x 587	
	38.2		in mm	38.8 x 25.1 x 23.1	985 x 638 x 587	
	39	Battery Voltage / Max. Ah / Max. kWh	V / Ah / kWh	36V / 1100Ah / 38.21kWh		
	39.1		V / Ah / kWh	48V / 770Ah / 35.67kWh		
	40	Battery Weight	lb kg	2,250 / 2,600	1025 / 1175	
41	Battery Floor Height	in mm	10.4	264		
41.1		in mm	9.8	249		
Misc.	42	Max. Op. Pressure for Attachments	psi Bar	2,540	175	
	43	Max. Hyd. Oil Flow for Attachments	gpm lpm	8	30.3	

Dimension / performance specifications are based on a truck equipped with a 190" (4825 mm) triple telescopic mast and standard forks only. For specific truck configuration capacities and right angle stack dimensions, contact your local dealer.

Mast Chart				TL - Truckers Mast									
Dimensions	16	Collapsed Height	in mm	54.0	1370	58.0	1470	60.0	1520	61.0	1545	76.0	1930
	18	Lift Height	in mm	68.0	1725	76.0	1930	80.0	2030	82.0	2080	112.0	2840
	19	Extended Height ¹	in mm	116.5	2955	124.5	3155	128.0	3255	130.0	3305	160.5	4075
	15	Tilt (B/F) Std. OHG	deg	5/5		5/5		5/5		5/5		5/5	
	15.1	Tilt (B/F) Drive-in Rack OHG	deg	5/5		5/5		5/5		5/5		5/5	

1. Includes 48" (1219 mm) tall load backrest

Mast Chart				TL - Limited Free Lift Mast									
Dimensions	16	Collapsed Height	in mm	77.0	1955	83.0	2105	89.0	2260	95.0	2410	100.0	2540
	18	Lift Height	in mm	114.0	2895	126.0	3200	138.0	3505	150.0	3810	160.0	4060
	19	Extended Height ¹	in mm	162.5	4125	174.5	4425	186.5	4735	198.5	5035	208.5	5295
	15	Tilt (B/F) Std. OHG	deg	5/5		5/5		5/5		3/5		3/5	
	15.1	Tilt (B/F) Drive-in Rack OHG	deg	3/5		5/5		5/5		3/5		3/5	

1. Includes 48" (1219 mm) tall load backrest

Mast Chart				TF - Free Lift Mast									
Dimensions	16	Collapsed Height	in mm	77.0	1955	83.0	2105	89.0	2260	95.0	2410	100.0	2540
	18	Lift Height	in mm	117.0	2970	129.0	3275	141.0	3580	153.0	3885	163.0	4140
	17	Free Lift Height ¹	in mm	29.0	735	35.0	885	41.0	1040	47.0	1190	52.0	1320
	19	Extended Height ¹	in mm	166.0	4215	178.0	4515	190.0	4825	202.0	5125	212.0	5385
	15	Tilt (B/F) ² Std. OHG	deg	5/5		5/5		5/5		3/5		3/5	
	15.1	Tilt (B/F) ² Drive-in Rack OHG	deg	3/5		5/5		5/5		3/5		3/5	

1. Includes 48" (1219 mm) tall load backrest
 2. Tilt listed is when below tilt interlock height

Mast Chart				TT - Triple Telescopic Mast									
Dimensions	16	Collapsed Height	in mm	77.0	1955	83.0	2105	89.0	2260	95.0	2410	100.0	2540
	18	Lift Height	in mm	172.0	4365	190.0	4825	208.0	5280	226.0	5740	241.0	6120
	17	Free Lift Height ¹	in mm	29.0	735	35.0	885	41.0	1040	47.0	1190	52.0	1320
	19	Extended Height ¹	in mm	220.5	5600	238.5	6050	256.5	6515	274.5	6965	289.5	7355
	15	Tilt (B/F) ² Std. OHG	deg	5/5		5/5		5/5		3/5		3/5	
	15.1	Tilt (B/F) ² Drive-in Rack OHG	deg	3/5		5/5		5/5		3/5		3/5	

1. Includes 48" (1219 mm) tall load backrest
 2. Tilt listed is when below tilt interlock height

Mast Chart				QUAD									
Dimensions	16	Collapsed Height	in mm	83.0	2105	86.0	2185	89.0	2265	92.0	2340	95.0	2415
	18	Lift Height	in mm	240.0	6095	246.0	6245	258.0	6550	264.0	6705	276.0	7010
	17	Free Lift Height ¹	in mm	35.0	885	38.0	960	41.0	1040	44.0	1115	47.0	1190
	19	Extended Height ¹	in mm	288.5	7330	294.5	7485	306.5	7790	312.5	7940	324.5	8245
	15	Tilt (B/F) ² Std. OHG	deg	3/5		3/5		3/5		3/5		3/5	
	15.1	Tilt (B/F) ² Drive-in Rack OHG	deg	3/5		3/5		3/5		3/5		3/5	

1. Includes 48" (1219 mm) tall load backrest
 2. Tilt listed is when below tilt interlock height

Standard Equipment

1. Crown's Access 1 2 3 Comprehensive System Control
2. 36-volt system
3. AC traction and hydraulic systems
4. Crown-manufactured traction and hydraulic motors
5. Sealed rack and pinion steering
6. Intrinsic Stability System
 - System-controlled hydraulics
 - Travel and cornering speed control
 - Tilt Interlock
 - Stability-enhanced counterweight
 - Intelligent ramp control
7. e-GEN braking system with automatic parking brake
8. Crown FlexSeat - fabric with hip restraint and anti-cinch seatbelt
9. Extended steering wheel column with infinite adjustment
10. Manual hydraulic control levers
11. Crown Display
 - Battery discharge indicator with lift interrupt and re-key feature
 - Hour meters
 - User code ready
 - Event code indicator and notification
 - P1, P2, & P3 performance modes
 - Access 1 2 3 service menus
12. 13" diameter steering wheel
13. SB350 battery connector
14. InfoPoint System Maps
15. 48" (1220 mm) high load backrest
16. 5° forward tilt
17. On-demand power steering
18. Lift interrupt
19. Lift-out or side battery removal access
20. Cushion, smooth rubber tires
21. Keyswitch On/Off
22. Class II Hang-on fork carriage

Optional Equipment

1. TL Truckers, TL, TF, TT and QUAD masts
2. Mast stops and lift limit options
3. 7° & 10° forward tilt
4. Crown integral sideshifter
5. Factory installed attachments
 - Hang-on sideshifter
 - Fork positioners
 - Push/pulls
6. Additional load backrest heights
7. Additional fork lengths
8. Partial and fully tapered forks
9. 48-volt electrical system
10. Alternate Power Sources
 - V-Force Li-ion Ready
 - Fuel Cell Ready
11. Battery rollers
12. Battery retainer switch
13. Additional battery connectors
14. Seat Deck Connector Options
 - Single battery cable – 1 connector on seat deck
 - Dual battery cable – 2 connector on seat deck
15. Additional Tire options
 - Cushion, smooth non-marking rubber tires
 - Cushion, lugged rubber tires
 - Cushion, lugged non-marking rubber tires
 - Solid pneumatic
 - Solid pneumatic - non-marking

16. Drive-in Rack OHGs
17. OHG Top covers
 - Wire mesh
 - Plexiglass
 - Expanded metal
18. Additional seat options
 - Crown FlexSeat - vinyl
 - Suspension seat - fabric or vinyl
19. D4 Armrest
20. Mini-lever
21. Bionic hydraulic controls
 - Fingertip
 - Mini-lever
 - Dual-lever
 - Combination
22. Additional seatbelts
 - Orange Hi-vis seatbelt
 - Orange Hi-vis seatbelt with interlock
23. Foot Operated Directional Control (FODC)
24. Single or double accy hydraulic functions
25. Hydraulic quick disconnects
26. Pressure gauge and regulator
27. 5th Function hydraulics
28. Rearview mirrors
29. Light packages
 - Front and rear worklights - LED
 - Brake, back-up, and taillight package
 - Turn signals
30. Visual warning devices
 - Floor spot lights
 - Floor line lights - side lights only
 - Floor line lights - side and rear lights
 - Flashing lights

31. Travel alarms
32. WorkAssist Options
 - Operator fans
 - Clip Pad and Hook
 - Clip Pad
 - Hook
 - Accessory Clamp
 - Accessory Clamp and Mounting Plate
 - Shrink Wrap Holder
 - Storage Net
 - Cup holder
 - Pockets
 - Organization kits
 - Orange storage pocket
 - Rear storage bin
33. Productivity Options
 - InfoLink Ready
 - Tilt position assist
 - Traction motor cooling fan
34. Miscellaneous Options
 - B-post handle with horn button
 - Floor Mounted Horn Button
 - Accessory Cable
 - Keyless On/Off Switch
 - Keypad
 - Steering wheel spinner knob
 - Fire Extinguisher
 - LH Grab handle
 - 10" diameter steering wheel with spinner knob
35. Environmental Packages
 - EE Rating
 - Corrosion package
 - Freezer package



crown.com

You can count on Crown to build lift trucks designed for safe operation, but that's only part of the safety equation. Crown encourages safe operating practices through ongoing operator training, safety-focused supervision, maintenance and a safe working environment. Go to crown.com and view our safety section to learn more.

Because Crown is continually improving its products, specifications are subject to change without notice.

Crown, the Crown logo, the color beige, the Momentum symbol, Access 1 2 3, InfoPoint, e-GEN, Intrinsic Stability System, FlexSeat, InfoLink, V-Force and Work Assist are trademarks of Crown Equipment Corporation.

Copyright 2011-2024 Crown Equipment Corporation
SF14690 Rev. 04-24 Printed in U.S.A.